



SCHEMATIC DIAGRAM

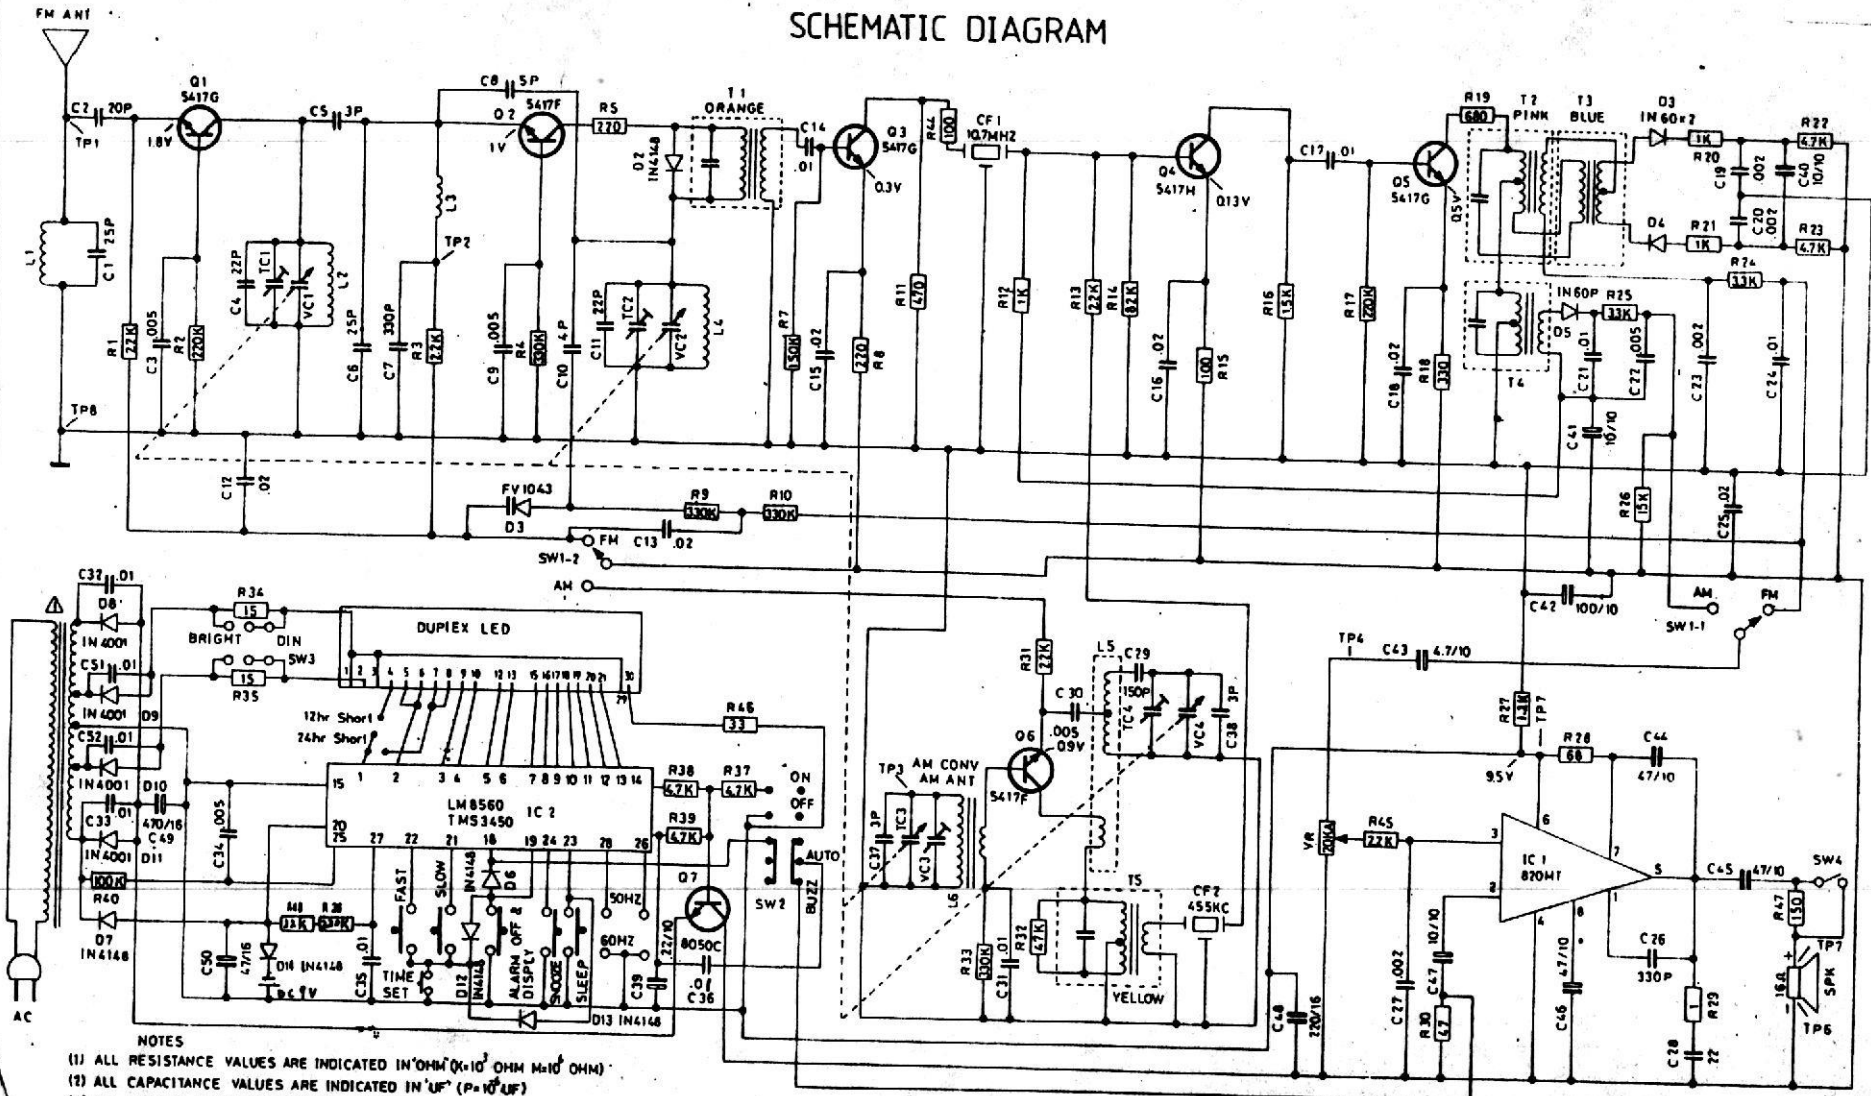

- NOTES**
- (1) ALL RESISTANCE VALUES ARE INDICATED IN OHMS (K=10³ OHM M=10⁶ OHM)
 - (2) ALL CAPACITANCE VALUES ARE INDICATED IN UF (P=10⁻⁶ UF)
 - (3) ALL VOLTAGE VLUES ARE INDICATED IN VOLTS, WITH NO SIGNAL INPUT MEASURED WITH A V.T.V.M



USED ON		SAMPLES MUST BE SUBMITTED FOR R & D APPRO. BEFORE PRODUCTION IS STARTED.	
MODEL	IN MICHIGAN	TOLERANCE:	
		1/4	1/2
		1/2	1/2
		1/2	1/2
		1/2	1/2
		1/2	1/2
		1/2	1/2
		1/2	1/2
TOLERANCE		MATERIAL TOLERANCE TO BE FURNISHED BY COMMERCIAL MANUFACTURER AS NOTED	
		DESIGN	CHECK
		APPROVED	DATE
		SCALE	UNIT
		REV	NO
		DATE	BY

ACTION ELECTRONICS CO., LTD.
 德盛電子股份有限公司

TITLE
 ACN-1880 SCHEMATIC DIAGRAM

MATERIAL

MKT-120

P5163

TBA220M-8