

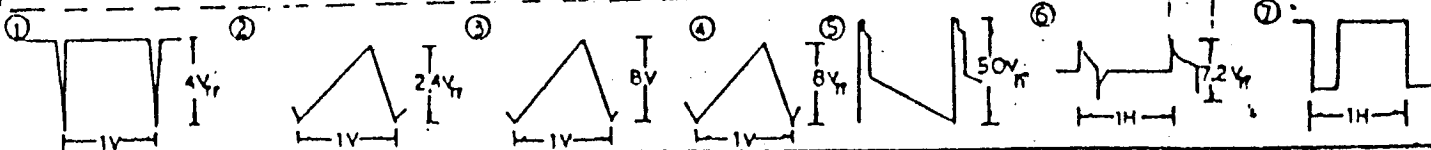


ISO-n

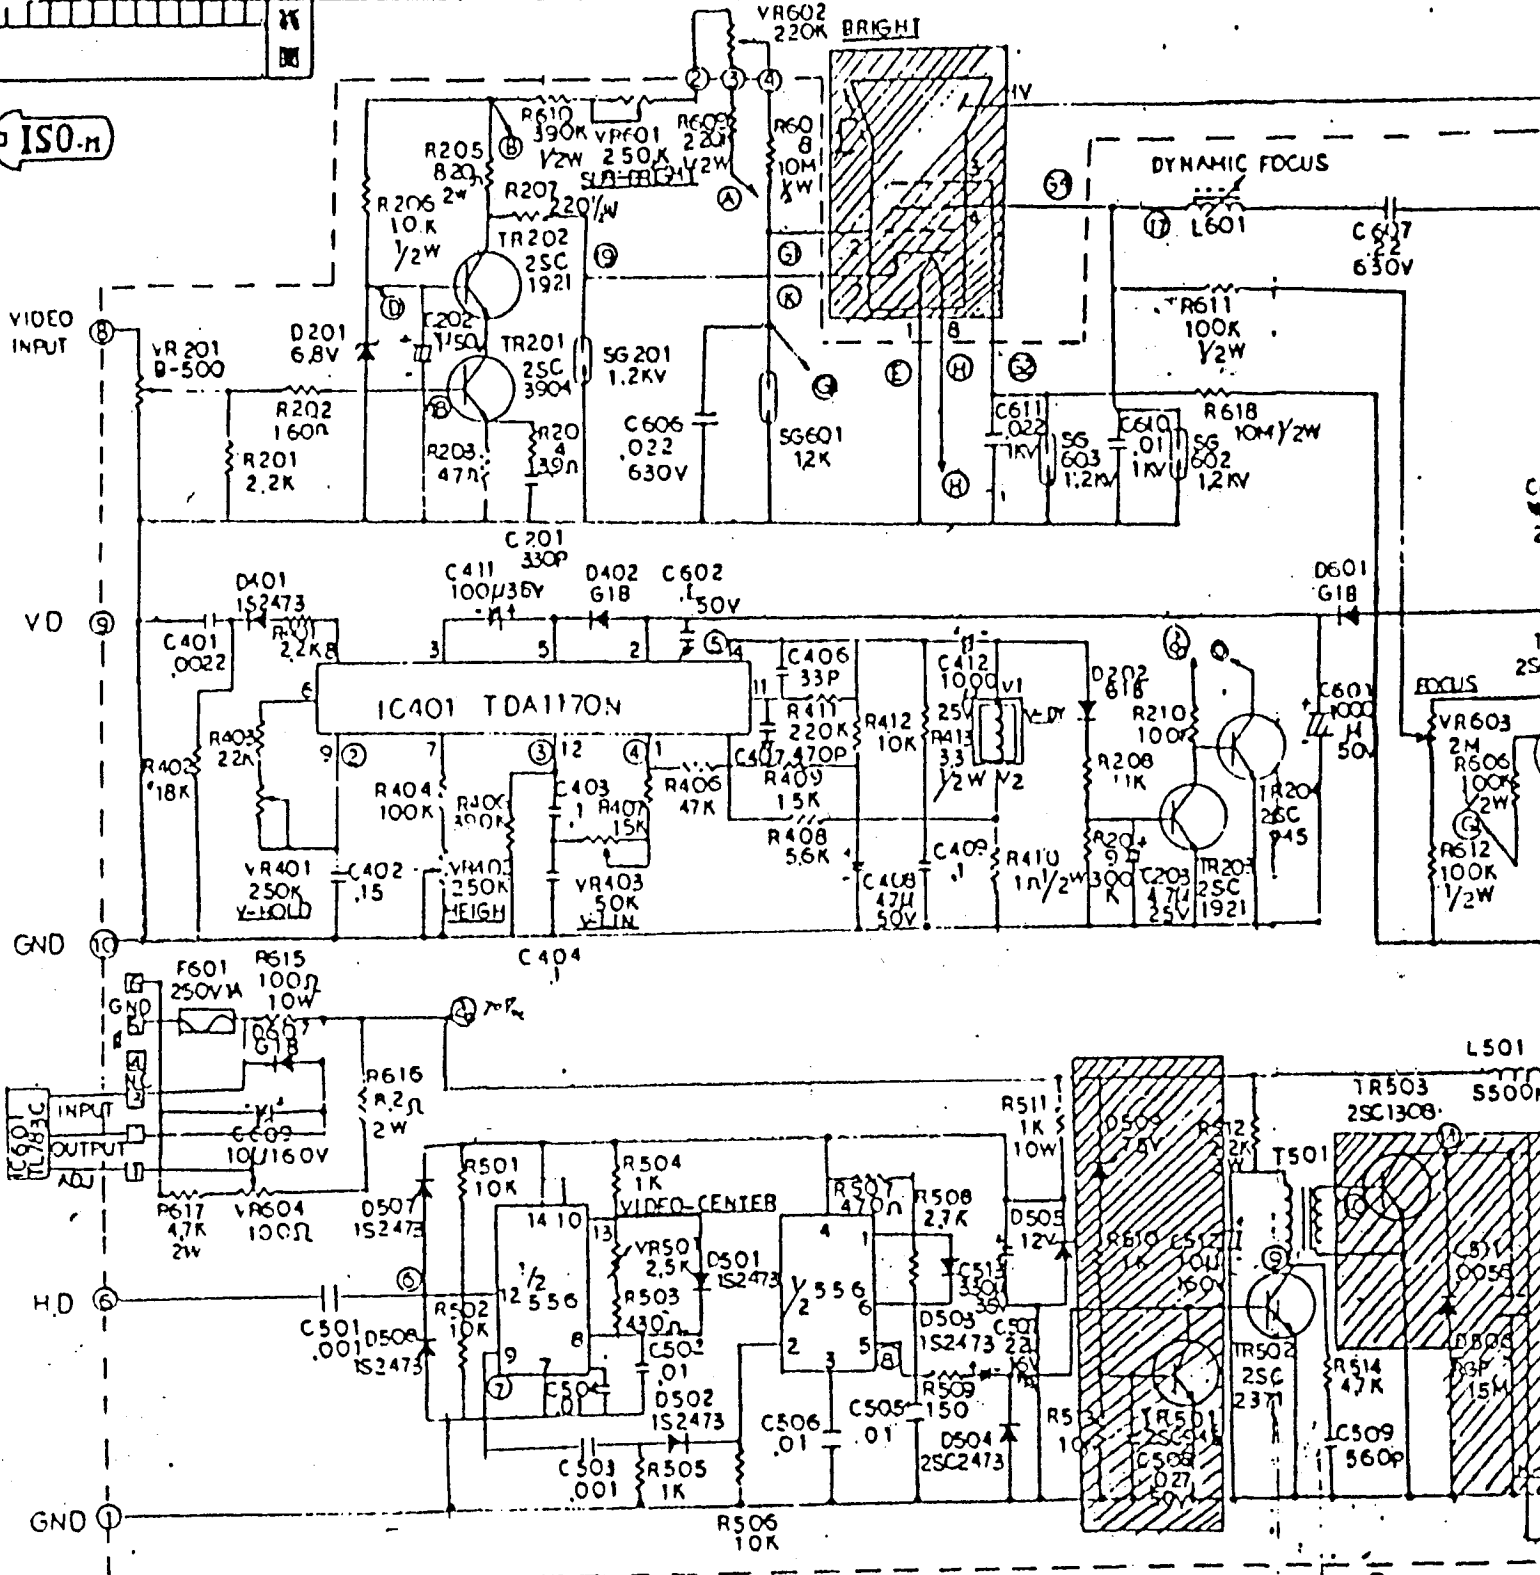

2 R 8


項	件名	件號	材質	尺寸	數量	備註

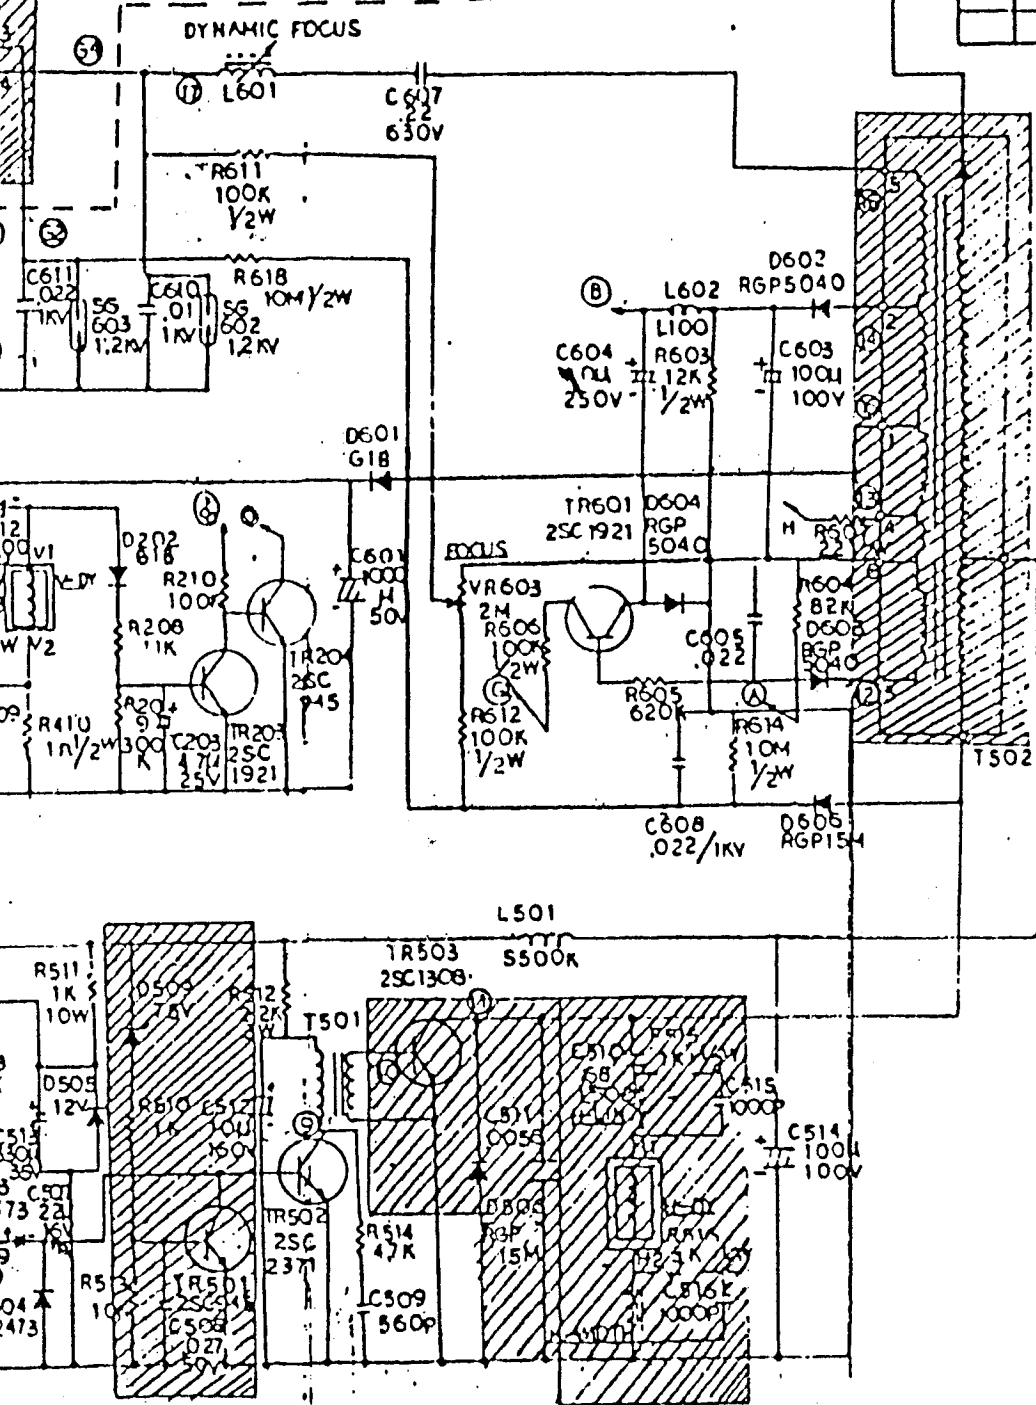

NOTE 1 RESISTOR VALUES ARE IN (OHM) A
 K: 1000Ω M: 1000000Ω
 2 ALL RESISTOR ARE 1/4W EXCEPT
 WHERE OTHERWISE INDICATED
 3 ALL CAPACITORS ARE 50V EXCEPT
 WHERE OTHERWISE INDICATED
 4 CAPACITORS ARE UF UNLESS
 OTHERWISE INDICATED. UF=10⁻⁶F
 5 VOLTAGES AND WAVE FORMS
 MEASURED UNDER 10FL. MOSAK
 PATTERN.

G
 (H) ----- HORIZONTAL RATE
 (V) ----- VERTICAL RATE

WARNING: REPLACEMENT PARTS WHICH
 HAVE SPECIAL SAFETY
 CHARACTERISTICS ARE INDICATED
 BY [SHADING] PARTS ON THE
 SCHEMATICS REPLACE THESE
 CRITICAL COMPONENTS WITH
 RECOMMENDED REPLACEMENT
 PARTS. DON'T DEGRADE THE
 SAFETY OF THE SET THROUGH
 IMPROPER SERVICING.

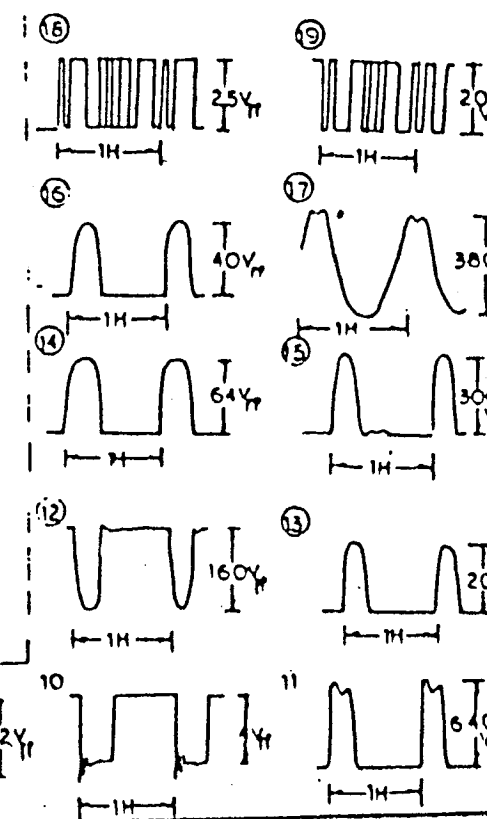

規定	仕様	72.1.10	比例		圖名	田路11
製					中文	
校		72.2.17			英文	TM1516
設		73.2.7				
製		72.11.10				
					東元電機株式会社	